




CLASSIC COLLECTION - NEWPORT

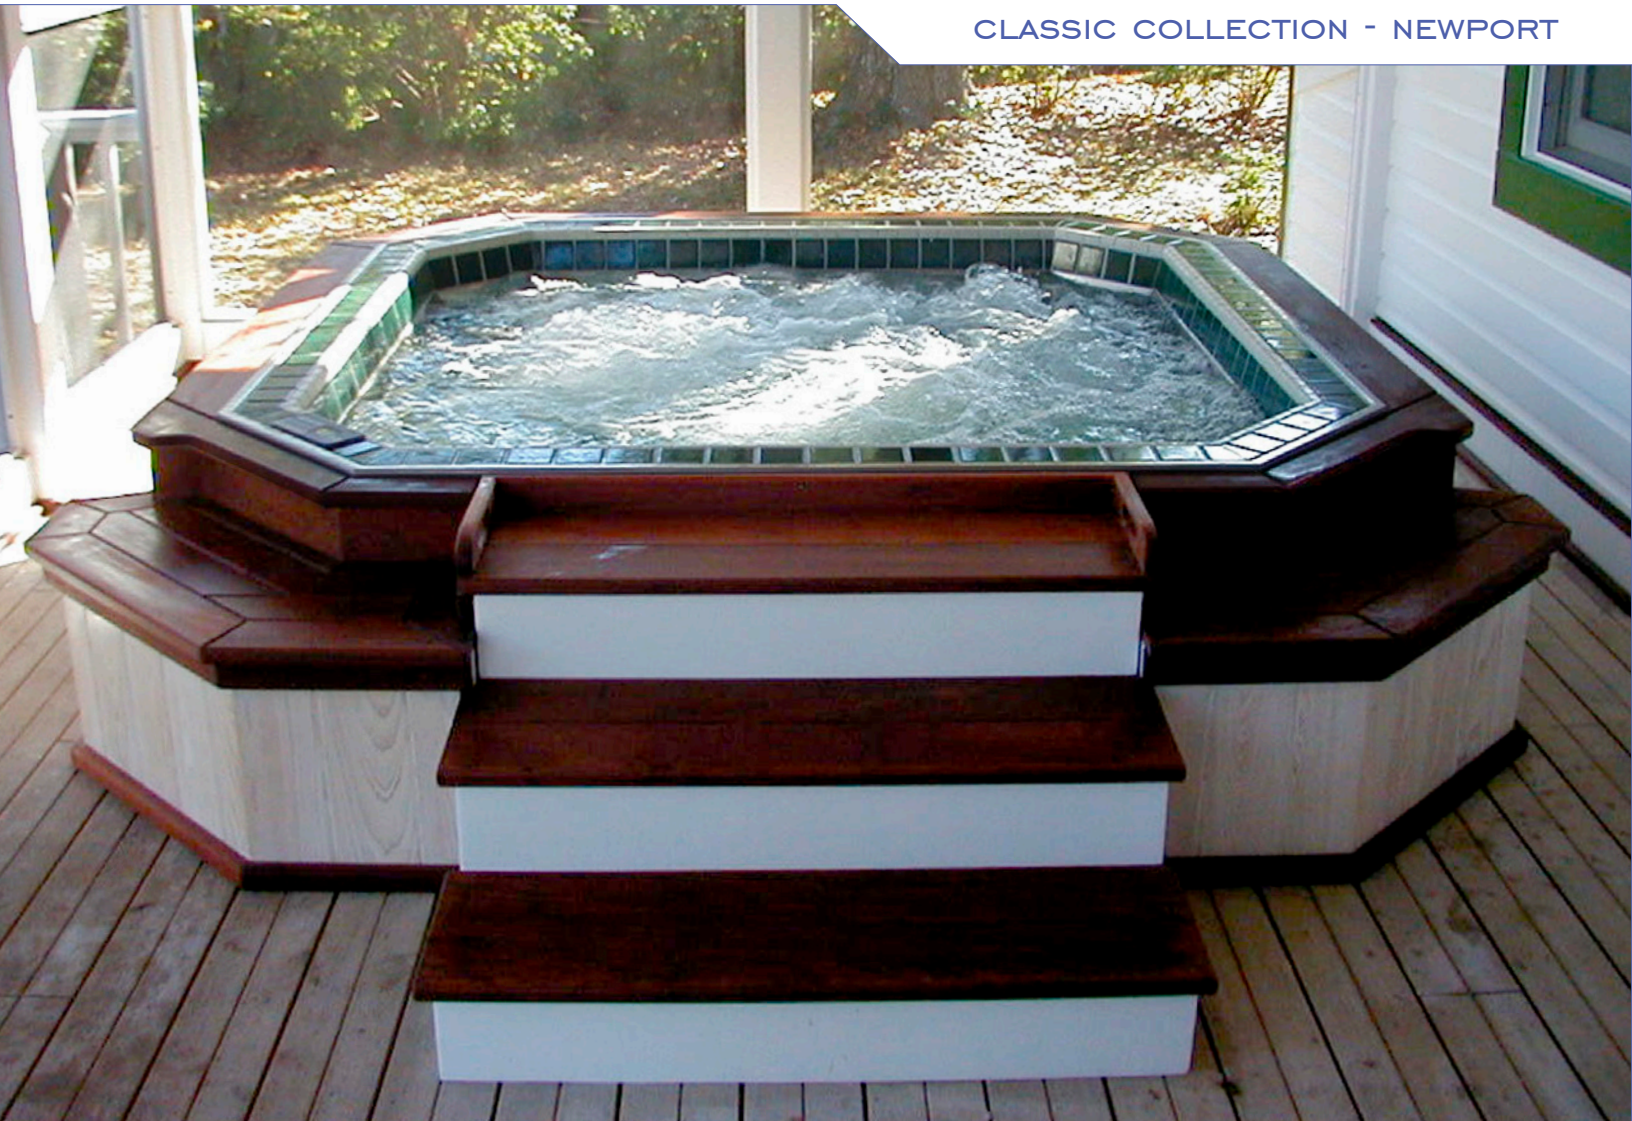

AN UNCOMMON LUXURY THAT
OUTLASTS AND OUTSHINES ANY
ORDINARY SPA

CLASSIC COLLECTION NEWPORT 80" X 80"



Bradford's Classic Collection of residential stainless steel spas arrive from our facility with all appropriate equipment. We provide frame-mounted equipment within the stainless steel frame or remote equipment on a lightweight, durable polypropylene platform. In-ground, recessed or on-grade final installations of a Bradford spa will require accessibility to the shell plumbing for the user. All electrical and plumbing must be performed by licensed trade contractors.

ADDITIONAL OPTIONS

Ask Bradford about customizing your spa with one or many of our unique extras:

- | | |
|------------------|-------------------|
| Waterfalls | Automatic Covers |
| Infinity Edges | Specialty Seating |
| Power Shower | In-Spa Loungers |
| Handrails | Air Blowers |
| LED Color Lights | Custom Finishes |

Seating	4-6 adults
Dimensions	80" x 80" x 41.5"
Shell Material	316L stainless steel (all stainless & tile trim); 304 stainless steel (full tile)
Capacity	323 gallons
Weight	565 lbs. dry; 3256 lbs. filled (tile trim model)
Frame	Built-in integral 304 stainless steel
Shell Insulation	High density urethane foam
Jets	8 or 16 commercial grade adjustable therapy jets
Steps	64" entry step; 12" tiled stair tread
Seats	13.5" wide bench seats on all sides
Lighting	Low voltage underwater color wheel light
Spa Cover	Deluxe insulated spa cover (excluded from shell only purchase)
Finish Options	Tile trim: tile on floor; seats, steps, waterline & top lip; stainless steel walls Stainless steel: non-directional buff finish on entire interior Full tile: entirely tiled surface
Remote Equipment or Frame Mounted:	BRD-300 with gas or electric heater (2 power supplies) 1 pump system (2 hp, 2 speed)=20 amp GFI service 240V, 4 wire (2 hot, 1 neutral, and 1 ground) to control circuit 2 pump system (2 hp 2 speed & 1 speed)=30 amp GFI service 240V, 4 wire (2 hot, 1 neutral, 1 ground) to control circuit
Frame Mounted Option	BRD-155 Control or Similar (1 power supply) 1 pump system (2 hp, 2 speed) w/ 5.5 kW heater=40 amp GFI service BRD-250 Control or Similar (1 power supply) 2 pump (2 hp, 2 speed & 1 speed) w/ 5.5 kW heater=60 amp GFI service Both systems-240 V, 4 wire (2 hot, 1 neutral, 1 ground) to control circuit
Heater Options	5.5 kW heater=30 amp GFI service-240V, 3 wire (2 hot, 1 ground) to heater 11 kW heater=60 amp GFI service-240V, 3 wire (2 hot, 1 ground) to heater Gas=15 amp GFI service 120V, 3 wire (1 hot, 1 neutral, 1 ground) to heater
Equipment Platform Size	48" x 48" platform; 43" tall; 280 lbs. (2 pump system)
Filter	100 sq.ft. filtration system (remote equipment)
Control System	Push button digital control panel
Certifications	IAPMO certified; VGBA compliant; AWS certified welding
Warranty	25 year structural stainless steel shell; 5 year residential tile adhesion with approved tile; 1 year plumbing; 1 year electrical

